

Additional Mounts Available

Taper Mount Suppressors have many muzzle device options to suit your specific needs. To see all available options see our website.

Stealth Flash Hider



Flash Comp




Hammer Comp



Cleaning Brush 3/4" Version



Alignment Check Rods

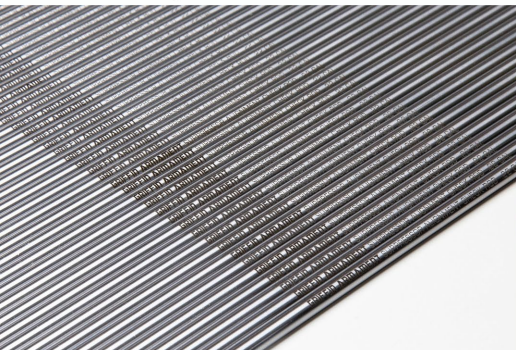

PRODUCT LIFETIME LIMITED WARRANTY:
Subject to the limitations outlined below, Griffin Armament will repair or replace free of charge any product we manufacture for the duration of this lifetime warranty. This warranty is unlimited in duration and covers at Griffin Armament's sole discretion, service, repair, and/or replacement of damaged products caused by normal use. Any repair not covered by the warranty will be billed at a maximum of 30% of current MSRP for a comparable product, subject to BATFE transfer fees as required.

LIMITATIONS: Griffin Armament's warranty does not cover loss, normal wear, damage to our product or the host weapon system resulting in whole or in part from abusive or negligent use, unauthorized modification, improperly threaded barrels, improperly mounted suppressors, improperly loaded or re-loaded ammunition, or neglect. Finish wear is cosmetic and is not covered by this warranty. Any repairs to the unit made necessary by the above mentioned factors may be invoiced to the owner at a maximum of 30% of current MSRP for the most comparable product. The individual barrel lengths and calibers warranted are listed in the manual you receive with your product, or on the product page [applicable only to the most current model of the respective product]. In all cases refer to the product manual for product limitations prior to using a Griffin Armament product. Warranty is subject to change without notice.

To learn more about Griffin Armament and the kit we provide, please visit us on the web at www.GriffinArmament.com or keep track of us via: Instagram, Facebook, and Youtube.



www.GriffinArmament.com

GRIFFIN ARMAMENT®



Configuring the Silencer

Figure 3)

Note: blast baffle lacks orientation tabs on this surface.



Blast baffle should be inserted first into the silencer body upon assembly. All cones should point toward the muzzle device and ports should align for best sound performance.



To install Taper Mount muzzle devices on host firearm start by cleaning and degreasing threads. Use provided shims to bring the muzzle device into proper time. Device is installed correctly when 40-50 ft/lbs of torque is applied and logo is centered at the bottom or magazine well side of the firearm. Add or remove shims as necessary to achieve proper alignment.

STILL HAVE QUESTIONS?

Search Youtube for "Griffin Armament Sportsman Install and Maintenance Tutorial" video.

Assembly / Disassembly of the Sportsman Series

Disassembly: Interface included flat washer with the front cap. Loosen cap by turning counter clock wise. If front cap is dirty and resistant to loosening, fixture washer in a vise and grip the silencer about the tube body. Apply downward pressure, into the washer to keep the washer engaged with the front cap slots while unscrewing. Failing to apply downward pressure with the tube body may cause the washer to disengage from the slotted cap and damage front cap geometry making removal more difficult. Once end cap is removed, push baffles out from the rear to the front of the suppressor using a wooden dowel and rubber hammer- if limited use has occurred between cleaning. Optionally available for purchase is the "Taper Mount Baffle Pusher Tool" which is available at www.griffinarmament.com. This is however not required unless periodic routine maintenance is not conducted.

Assembly: After cleaning tube and baffles, stack baffles making sure to align ports in the same orientation. The blast baffle should be inserted first and is the only baffle that does not have keys on the cone side of the cylinder face (See Figure 3). After inserting baffles into the tube ensure they are locked together by rotating them in the tube. Once baffles are fully seated screw end cap into tube until tight.



Cleaning and Use

Clean the mount interface of the silencer and the muzzle device after every use. Failure to clean the mount can result in your suppressor becoming stuck on the muzzle device. An Oatey 1" pipe cleaning brush can be used to clean the inside of Taper Mount interfaces of the suppressor. The inside bore of the silencer tube body can be cleaned using a 1.5" pipe cleaning brush. Various brushes for cleaning are available at www.griffinarmament.com. Use of an anti-crease type product on the thread interfaces will allow for easier disassembly and maintenance. Barrel ratings: 11.5" 5.56mm, 8" 300BLK, 10" 7.62x39, 12.7" 6.8SPC, 16" 308win, 22" 300Win Mag, 24" 300 RUM. .338 suppressor is rated for all previous and 22" .338LM. The sportsman is intended for sporting / hunting rates of fire only.

WARNING: FAILURE TO READ AND UNDERSTAND THIS MANUAL PRIOR TO USE MAY RESULT IN INJURY OR DAMAGE

Confirm Alignment

Clear your firearm in accordance with it's manufacturers user manual. Install the taper Mount per instructions. After mounting the muzzle device with a shim set, attach the silencer to the mount. With the Sportsman silencer firmly tightened onto the mount look down the silencer bore from the end cap illuminating the bore with a light OR using Griffin's alignment check rods. Confirm visual alignment by ensuring the bore of the silencer is in the center of the bore of the firearms barrel. If you do not feel capable of confirming alignment, take your firearm to your Griffin dealer. Keep in mind each firearm you use this silencer on needs to be checked for alignment. Failure to do so or align properly may result in catastrophic failure.